


ExtremeNode ENS6400 Blade Servers Specifications

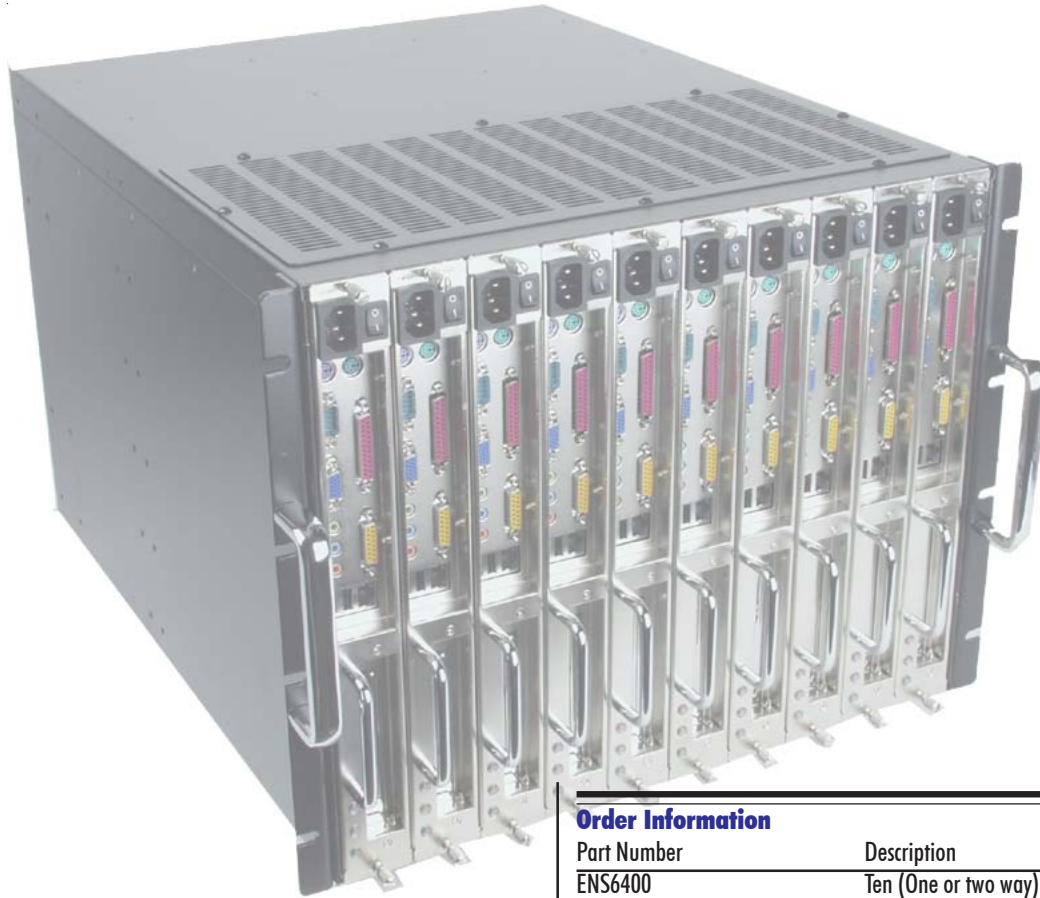

Order Information

Part Number	Description
ENS6400	Ten (One or two way) AMD Opteron Blade Server
EN6400	One or two way AMD Opteron Blade Server
ENH108	8U ExtremeNode chassis (Required for EN2400 and EN6400 Blade Server)

System Configuration

Processor Type	AMD Opteron Processor
Processor Speed	1.4Ghz, 800 Mhz FBS
Total Processors	Twenty AMD Opteron Processor
Blade Server Model	ENS6400
Total Memory Installed	10GB Memory
Chassis	One ENH108 8U Chassis

Performance

MIPS	N/A
Gigaflops	N/A

Installation Option

CD-ROM	One external USB 52X IDE CDRW CD-ROM
Software	Ghost 2003 Image Software
Operating System	Redhat 9.0

Power Supply

AC Power	90-264 V AC (47-63 Hz)
AC Switching method	Auto sensing
Input Current	N/A
BTU/hour	Maximum: N/A ; Nominal: N/A
Maximum output	4000 Watts

Environment

Ambient Temperature	Operating (system): 5°C to 35°C, with maximum change not to exceed 10°C; Non-operating / storage (system): -40°C to +70°C
Relative Humidity	Non-operating: 95% @ 35°C non-condensing
Dimensions & Color	14 inch height x 19 inch width x 26 inch depth; black color
Weight	150 lb

